

Physical Hazards: Thermal Environment

Core Body of Knowledge for the Generalist OHS Professional





Copyright notice and licence terms

First published in 2012 by the Safety Institute of Australia Ltd, Tullamarine, Victoria, Australia.

Bibliography. ISBN 978-0-9808743-1-0

This work is copyright and has been published by the Safety Institute of Australia Ltd (SIA) under the auspices of HaSPA (Health and Safety Professionals Alliance). Except as may be expressly provided by law and subject to the conditions prescribed in the Copyright Act 1968 (Commonwealth of Australia), or as expressly permitted below, no part of the work may in any form or by any means (electronic, mechanical, microcopying, digital scanning, photocopying, recording or otherwise) be reproduced, stored in a retrieval system or transmitted without prior written permission of the SIA.

You are free to reproduce the material for reasonable personal, or in-house, non-commercial use for the purposes of workplace health and safety as long as you attribute the work using the citation guidelines below and do not charge fees directly or indirectly for use of the material. You must not change any part of the work or remove any part of this copyright notice, licence terms and disclaimer below.

A further licence will be required and may be granted by the SIA for use of the materials if you wish to:

- reproduce multiple copies of the work or any part of it
- charge others directly or indirectly for access to the materials
- include all or part of the materials in advertising of a product or services, or in a product for sale
- modify the materials in any form, or
- publish the materials.

Enquiries regarding the licence or further use of the works are welcome and should be addressed to:

Registrar, Australian OHS Education Accreditation Board

Safety Institute of Australia Ltd, PO Box 2078, Gladstone Park, Victoria, Australia, 3043 registrar@ohseducationaccreditation.org.au

Citation of the whole *Body of Knowledge* should be as:

HaSPA (Health and Safety Professionals Alliance).(2012). *The Core Body of Knowledge for Generalist OHS Professionals*. Tullamarine, VIC. Safety Institute of Australia.

Citation of individual chapters should be as, for example:

Pryor, P., Capra, M. (2012). Foundation Science. In HaSPA (Health and Safety Professionals Alliance), *The Core* Body *of Knowledge for Generalist OHS Professionals*. Tullamarine, VIC. Safety Institute of Australia.

Disclaimer

This material is supplied on the terms and understanding that HaSPA, the Safety Institute of Australia Ltd and their respective employees, officers and agents, the editor, or chapter authors and peer reviewers shall not be responsible or liable for any loss, damage, personal injury or death suffered by any person, howsoever caused and whether or not due to negligence, arising from the use of or reliance of any information, data or advice provided or referred to in this publication. Before relying on the material, users should carefully make their own assessment as to its accuracy, currency, completeness and relevance for their purposes, and should obtain any appropriate professional advice relevant to their particular circumstances.

Physical Hazards: Thermal Environment

The OHS Body of Knowledge for Generalist OHS Professionals has been developed under the auspices of the **Health and Safety Professionals Alliance**



The Technical Panel established by the Health and Safety Professionals Alliance (HaSPA) was responsible for developing the conceptual framework of the OHS Body of Knowledge and for selecting contributing authors and peer-reviewers.

The Technical Panel comprised representatives from:









The Safety Institute of Australia supported the development of the OHS Body of Knowledge and will be providing ongoing support for the dissemination of the OHS Body of Knowledge and for the maintenance and further development of the Body of Knowledge through the Australian OHS Education Accreditation Board which is auspiced by the Safety Institute of Australia.





Physical Hazards: Thermal Environment April, 2012



Synopsis of the OHS Body of Knowledge

Background

A defined body of knowledge is required as a basis for professional certification and for accreditation of education programs giving entry to a profession. The lack of such a body of knowledge for OHS professionals was identified in reviews of OHS legislation and OHS education in Australia. After a 2009 scoping study, WorkSafe Victoria provided funding to support a national project to develop and implement a core body of knowledge for generalist OHS professionals in Australia.

Development

The process of developing and structuring the main content of this document was managed by a Technical Panel with representation from Victorian universities that teach OHS and from the Safety Institute of Australia, which is the main professional body for generalist OHS professionals in Australia. The Panel developed an initial conceptual framework which was then amended in accord with feedback received from OHS tertiary-level educators throughout Australia and the wider OHS profession. Specialist authors were invited to contribute chapters, which were then subjected to peer review and editing. It is anticipated that the resultant OHS Body of Knowledge will in future be regularly amended and updated as people use it and as the evidence base expands.


Conceptual structure

The OHS Body of Knowledge takes a *conceptual@approach. As concepts are abstract, the OHS professional needs to organise the concepts into a framework in order to solve a problem. The overall framework used to structure the OHS Body of Knowledge is that:

Work impacts on the **safety** and **health** of humans who work in **organisations**. Organisations are influenced by the **socio-political context**. Organisations may be considered a **system** which may contain **hazards** which must be under control to minimise **risk**. This can be achieved by understanding **models causation** for safety and for health which will result in improvement in the safety and health of people at work. The OHS professional applies **professional practice** to influence the organisation to being about this improvement.

Physical Hazards: Thermal Environment

This can be represented as:

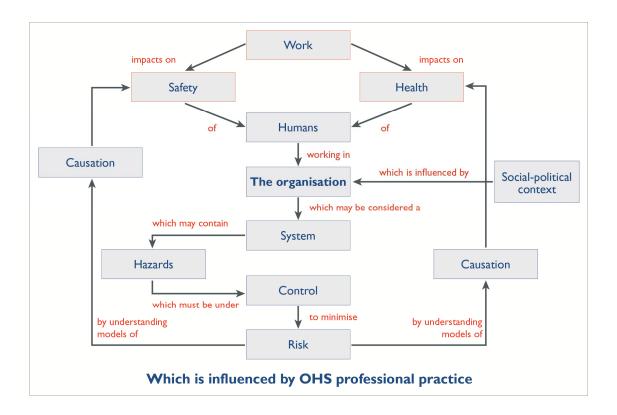

Audience

The OHS Body of Knowledge provides a basis for accreditation of OHS professional education programs and certification of individual OHS professionals. It provides guidance for OHS educators in course development, and for OHS professionals and professional bodies in developing continuing professional development activities. Also, OHS regulators, employers and recruiters may find it useful for benchmarking OHS professional practice.

Application

Importantly, the OHS Body of Knowledge is neither a textbook nor a curriculum; rather it describes the key concepts, core theories and related evidence that should be shared by Australian generalist OHS professionals. This knowledge will be gained through a combination of education and experience.

Accessing and using the OHS Body of Knowledge for generalist OHS professionals

The OHS Body of Knowledge is published electronically. Each chapter can be downloaded separately. However users are advised to read the Introduction, which provides background to the information in individual chapters. They should also note the copyright requirements and the disclaimer before using or acting on the information.

Physical Hazards: Thermal Environment

Dr Ross Di Corleto Phd, BappSc, GdipOcchyg, MSc, FaIOH, FSIA, COH

Principal Adviser ó Industrial Hygiene. RioTinto Email: ross.dicorleto@riontinto.com

Ross first became involved in health and safety in the power generation industry in Victoria over 30 years ago and is currently the Principal Adviser Industrial Hygiene for the Rio Tinto global group, based in Brisbane and an Adjunct Associate Professor at the University of Queensland. Ross was a co-author of the *Heat stress standard and documentation developed for use in the Australian environment* published by the Australian Institute of Occupational Hygienists. His areas of particular interest include the thermal environment, biological monitoring and Polycyclic Aromatic Hydrocarbons.

Peer reviewers

Dr David Bromwich, PhD, FAIOH, CIH, COH Adjunct Associate Professor, Griffith University

Peter Knott, COH Senior Occupational Hygienist, 3M Australia Pty Limited

> Core Body of Knowledge for the Generalist OHS Professional

Core Body of Knowledge for the Generalist OHS Professional

Physical Hazards: Thermal Environment

Abstract

The complex range of hazards associated with the thermal environment is widely acknowledged as a serious Occupational Health and Safety (OHS) issue. Exposure to extreme heat or cold can result in illness, injury and, in extreme cases, death. While high-risk situations will require specialist occupational hygiene advice, the generalist OHS professional should have an understanding of the impact of hot and cold environments, risk assessment methods and the regulatory framework as a basis for advising on, implementing, and monitoring controls. This chapter presents fundamental information about potential health effects, assessment and control methods and, given the relevance of heat exposure to Australian working conditions, outlines a three-tiered approach to the assessment of heat exposure.

Keywords

thermal environment, heat, cold, hypothermia, hyperthermia, burn

Physical Hazards: Thermal Environment April, 2012

Contents

1	Ir	troduction1			
	1.1	Definitions	1		
2	Н	Historical context	2		
3	Е	Extent of the problem	3		
4	U	Understanding the impact of hot environments	4		
	4.1	Physiological response	4		
	4.2	Acute health effects	7		
	4.3	Chronic health effects	8		
	4.4	Other hazards	8		
	4.5	Risk assessment and assessing the thermal environment	8		
	4.6	Legislation and standards	12		
	4.7	Controls	14		
5	U	Understanding the impact of cold environments	15		
	5.1	Health effects	16		
	5.2	Legislation and standards	17		
	5.3	Controls	18		
6	C	Contact injuries	18		
7	Iı	mplications for OHS practice	20		
8	S	ummary	20		
K	ey th	ninkers and useful references	21		
R	efere	ences	21		
A	ppen	ndix 1: Basic Thermal Risk Assessment (informative only)	29		



1 Introduction

The management of thermal exposures has long been an issue for the Occupational Health and Safety (OHS) professional. The exposure of workers to extreme heat or cold can result in serious illnesses and injuries, and even death. Risk management is complicated by not only the vagaries of the environment, but also by the variability of the human body. This complexity cannot always be eliminated and often requires specialist expertise; thus the generalist OHS professional should have access to specialist occupational hygiene advice in high-risk situations. Nevertheless, there is a role for the generalist OHS professional to utilise some readily available tools and a systematic assessment process to identify the key issues and implement effective controls.

Consequently, this chapter focuses on the health effects associated with exposure to the extremes of the thermal environment, risk assessment, and the identification and application of controls to protect workers from exposure to the effects of heat and cold. It does not provide information relating to management of thermal comfort. Furthermore, while this chapter provides some information relevant to working in cold environments, it is predominantly concerned with exposure to heat as this is most relevant for the Australian climate. Heat stress, a prominent industry concern, impacts directly on the individual and is an indirect contributor to many incidents in Australian workplaces. This chapter presents a systematic three-tiered approach to risk assessment in hot environments.

1.1 Definitions

Heat stress occurs õwhen a personøs environment (air temperature, radiant temperature, humidity and air velocity), clothing and activity interact to produce a tendency for body temperature to riseö (Parsons, 1998). Cold stress has been defined as õa thermal load on the body under which greater than normal heat losses are anticipated and compensatory thermoregulatory actions are required to maintain the body thermally neutralö (Holmer, 1998). The US Center for Disease Control and Prevention explained:

Workers who are exposed to extreme heat or work in hot environments may be at risk of **heat stress**. Exposure to extreme heat can result in occupational illnesses and injuries. Heat stress can result in heat stroke, heat exhaustion, heat cramps, or heat rashes. Heat can also increase the risk of injuries in workers as it may result in sweaty palms, fogged-up safety glasses, and dizzinessí Workers at risk of heat stress include outdoor workers and workers in hot environments such as firefighters, bakery workers, farmers, construction workers, miners, boiler room workers, factory workers, and others. (CDC, 2011a)

Workers who are exposed to extreme cold or work in cold environments may be at risk of **cold stress**. Extreme cold weather is a dangerous situation that can bring on health emergencies in susceptible people, such as those without shelter, outdoor workers, and those who work in an area that is poorly

-

¹ This chapter assumes that the reader is a familiar with -thermal science, øincluding convection, radiation and conduction, and basic physiology as described in *OHS BoK* Foundation Science.

² For more information on thermal comfort, see ANSI/ASHRAE (2010).

insulated or without heatí Prolonged exposure to cold will eventually use up your bodyøs stored energy. The result is hypothermia, or abnormally low body temperature. A body temperature that is too low affects the brain, making the victim unable to think clearly or move well. (CDC, 2011b)

In addition, the following CCOHS (2008) definitions are relevant to a discussion on thermal environment:

Acclimatization ó Physiological changes which occur in response to several days of heat exposure and make the body accustomed to a hot environment.

Convection ó Process of heat exchange between the body and the surrounding air or fluid as a result of bulk flow of that air or fluid.

Dehydration ó Loss or deficiency of water in body tissues caused by sweating, vomiting or diarrhoea. Symptoms include excessive thirst, nausea, and exhaustion.

Heat cramps 6 Painful and often incapacitating cramps in muscles. Heat cramps are caused by depletion of salt in the body as a result of heavy sweating, and ingestion of water without replacing salt.

Heat exhaustion 6 Weakness, lassitude, dizziness, visual disturbance, feeling of intense thirst and heat, nausea, vomiting, palpitations, tingling and numbness of extremities after exposure to a hot environment

Heat hyperpyrexia ó Rise in body temperature with moist skin and mental dysfunction, caused by exposure to an extremely hot environment.

Heat rash (prickly heat or milliaria) ó An itchy rash of small raised red spots on the face, neck, back, chest and thighs caused by a hot and moist environment.

Heat strain ó Physiological and behavioural responses of the body as a result of heat exposure.

Heat stroke ó Acute illness caused by overexposure to heat. Symptoms are dry, hot skin, high body temperature (usually over 41°C] and mental dysfunction.

Heat syncope ó Temporary loss of consciousness [fainting] induced by insufficient flow of blood to the brain. Recovery is normally prompt and without any long-term ill effects.

Metabolic rate ó Rate of energy (heat) production of the body which varies with the level of activity.

Natural Wet Bulb Temperature ó Air temperature measured using a thermometer in which the bulb is covered with wet cotton wick and cooled by the natural movement of air.

Nausea ó The feeling that one is about to vomit as experienced in seasickness.

Radiation (heat) ó Transfer of heat between hot and cold bodies without contact between them.

Relative humidity ó The ratio of the water vapour content of air to the maximum possible water vapour content of air at the same temperature and air pressure.

2 Historical context

Goldman (2001, p. 4) revealed that the effects of hot environments were documented in the earliest writing; by 3000 BC, the Romans, Egyptian and Greeks had linked the appearance of Sirius, the dog star, with õushering in the ±dog daysøof summerí [and] bringing on fever in men and madness in dogs.ö There are also references to early controls; for example:

The Roman legionary used an early form of auxiliary cooling, inserting rushes into his head gear and keeping them wet with water...[and used] auxiliaries to carry as much of the legionnairesøload, and do

OHS Body of Knowledge Page 2 of 29 Physical Hazards: Thermal Environment April, 2012 as much of the engineering digging as possible, thus sparing the fighting edge of the legion (Goldman, 2001, p. 5).

In 1774 Sir Charles Blagden (Royal Society 1774), discussed a number of experiments undertaken in a heated room in which he commented on ofthe wonderful power with which the animal body is endued, of resisting heat greatly greater than its own temperatureö.

In the early 1900s a number of authors wrote on the effects of heat and humidity on workers (Moss et al, 1923; Young et al, 1920; Vernon et al 1932). 1925 saw the development of the effective temperature index (Houghton and Yagloglou, 1924), a key milestone in the assessment of thermal comfort, then in 1957 an investigation into casualties during training in the US Navy led to the development of the now well known wet bulb globe temperature index (WBGT) (Yaglou and Minard, 1957). Hunt (2011) in describing the mining industryøs long-term struggle with heat stress, cited a 1930 incident rate of fatality from heat stroke in South African mines of 1.5 per thousand workers.

Similarly, there is very early evidence of the health effects of cold environments. Patton (2001) chronicled the effects of cold stress on warfare, commencing with an account of the Battle of Cunaxa near Babylon in the winter of 4016400 BC when 6,000 of Athenian Xenophon 10,000 men died from cold exposure and frostbite. The statistics remained large-scale through the centuries. For example, there were more than 15,000 cold injuries during the American Civil War (186161865); in World War I the British army sustained 115,000 cold and frostbite injuries, and 2000 Russians died from frostbite and cold exposure during two nights in 1916; and in World War II cold injuries numbered in the millions (Patton, 2001). The magnitude of cold-stress-related morbidity and mortality during World War II stimulated significant programs of research of o solve the problems of the etiology and treatment of frostbite, trench foot and hypothermiao (Patton, 2001, p. 335) that have resulted in orapid rewarming in the fieldo (p. 342) as well as physical and psychological preparation for the elements.

Whilst there has been significant advances made in the control and management of both hot and cold environments since these early days there continues to be an issue with the occurrence of thermally related injuries and illnesses in current times.

3 Extent of the problem

Examination of Australian workersøcompensation claim data (Safe Work Australia, 2006ó 07) provides little indication of the extent of the problems associated with working in a hot or cold thermal environment with only 55 claims in the year 2006ó07³ (including 10 contacts with hot objects, 25 exposures to environmental heat and 10 exposures to environmental cold). In 2006ó07, there were two recorded fatalities associated with

-

³ The most up-to-date complete data available at the time of writing

exposure to environmental heat. The human body¢s complex response to hot or cold environments includes subtleties of physiological/pathological change that are unlikely to be reflected in workers¢ compensation data. Indeed, due to under-reporting, misdiagnosis and lack of public awareness of the many ways it can contribute to death, illness or injury, cold stress has been identified as õpossibly one of the most underrated killers in modern medicineö (Lloyd, 1986, p. 3).

The Occupational Health and Safety Council of Ontario (OHSCO, 2009, p. 3) indicated that heat stress is likely to be a concern in all workplaces where ÷yesø is the answer to one or more of the following questions:

- Has anyone been affected by heat in your workplace?
- Are fans needed to keep workers cool?
- Is work done in direct sunlight?
- Are there heat-producing processes or equipment in the workplace?
- Do workers wear extra clothing/protective equipment that can make them hot (e.g. overalls, respirators, hard hats, etc.)?
- Have workers ever expressed concern about heat in the workplace?

Shearing is an extreme example of a heat-affected occupation; it is often undertaken in uninsulated corrugated iron sheds and shearers are susceptible to heat rash, heat exhaustion and heat stroke (WorkSafe Victoria, 2001). Also, despite improvements in working conditions, workers in the mining industry remain particularly vulnerable to heat stress. In a study of heat exhaustion in a deep underground mine in Australia, Donoghue, Sinclair and Bates (2000) found that while the average annual incidence was relatively low (43 cases per million worker-hours underground; a total of 106 cases), it was much higher during summer (e.g. 147 cases per million worker-hours underground in February).

4 Understanding the impact of hot environments

Understanding the impact of working in hot environments requires some knowledge of the physiological responses of the body and the nature of the relevant acute and chronic health effects. This knowledge provides a basis for risk assessment, which is presented as a three-tiered approach that considers the complexity of the situation, the level of risk and the availability of expert advice. A brief summary of the legislative requirements and standards sets the context for discussion of relevant controls.

4.1 Physiological response

4.1.1 Homeostasis

Homeostasis is ofthe maintenance of a constant internal environment within the bodyö; it includes not only control of the body temperature, but also control of the water balance of the blood, the blood sugar level and the blood urea level (Givens & Reiss, 2002, p. 56).

The human body operates within a very narrow core temperature band. While there are diurnal variations, normal internal core body temperature usually ranges from 36.8°C to 37.2°C. To maintain this internal temperature balance, any heat impact on the body, whether from external environmental conditions or generated as a result of work performed by the individual, must be balanced by an equivalent heat loss from the body. If this does not occur, there is a net heat gain and heat stress is experienced by the individual (see, for example, BOHS, 1996).

The body heat balance process is often likened to a car engine: the organs and muscles are the engine that generates heat; the blood is the coolant that takes the heat from the core to the skin, which is the radiator; and the hypothalamus in the brain is the body thermostat. Consider the following example:

A person working in an air-conditioned workshop starts to generate heat. The core temperature begins to rise and the hypothalamus (the thermostat) signals increased heart rate and dilation of blood vessels at the periphery so that a greater volume of blood is distributed to the surface of the skin. Once the blood reaches the skin (often making the person appear 'flushed'), the heat is transferred to the cool environment by convection, and the blood temperature lowers and is returned to the core where the core temperature drops. This is a simple, but effective process for cooling the body. However, if the outside temperature is elevated, the process of heat transfer to the external environment is not as efficient. In this case, the body begins to sweat, and as the sweat evaporates the skin is cooled, which in turn cools the blood and hence lowers the core temperature. In principle, this is similar to the canvas water bag on the front of a ute or the old bush fridge in a canvas bag. Sweat that drips off has no cooling effect and sweat that soaks a shirt has a much-reduced cooling effect.

The most effective means of regulating temperature is via this evaporation of sweat, which may account for up to 98% of the cooling process (Werner et al, 1993). If fluid is not replaced, the individual can experience reduced capacity for physical work, fatigue and psychological changes:

- Dehydration of 1 to 2% of body weight results in a 6 to 7% reduction in physical work rate.
- Dehydration of 3 to 4% of body weight results in a 22% to 50% reduction in work rate, for õmoderateö and õhotö environments, respectively.
- Mental performance (mental function, visuomotor skills and arithmetic tests) begins to decrease at 2% dehydration and thereafter is proportional to the degree of further dehydration (Brake, 2001, p. 278).

4.1.2 Acclimatisation

Heat acclimatisation is a complex physiological process that occurs over time as the body adjusts to the thermal environment. A heat-acclimatised state is defined as õan organismøs ability to perform increased work in the heat because of improvements in heat dissipation brought on by repeated mild elevations in core temperatureö (Amorim & Moseley, 2010, p. 75). The acclimatisation process results in greater efficiency of the body to control its internal temperature. Benefits of heat acclimatisation documented by Bricknell (1996) have been summarised as:

- More finely tuned sweating reflexes, with increased sweat production rate at lower electrolyte concentrations
- Lower rectal and skin temperatures than at the beginning of exposure
- More stable and better regulated blood pressure with lower pulse rates, and
- Improved productivity and safety (Di Corleto, Coles & Firth, 2003).

Each physiological change associated with acclimatisation (e.g. cardiovascular stability, fluid and electrolyte balances, sweat rates and temperature responses) has its own rate of change during this process. Mere exposure to heat does not confer acclimatisation; an elevated metabolic rate for about 2 hours per day in the hot conditions is required (Bass, 1963).

Heat acclimatisation is acquired slowly over weeks of continued activity with heat stress. While the general consensus is that heat acclimatisation is gained faster than it is lost, less is known about the time required to lose acclimatisation. Brake, Donoghue and Bates (1998) suggested that loss of acclimatisation occurs over 7 to 21 days. Generally for Monday-to-Friday workers, the weekend loss is transitory and quickly made up, such that by Tuesday or Wednesday an individual is as well acclimatised as they were on the preceding Friday. If, however, there is a week or more of no exposure, loss is such that the regain of acclimatisation requires the usual 4 to 7 days (Bass, 1963).

An acclimatisation period is recommended for any new workers to site or workers returning from extended leave (i.e. >14 days) in a more temperate climate (Brake, Donoghue & Bates, 1998). It should be noted that individuals differ in their ability to acclimatise to heat.

4.1.3 Hydration and fluid requirements

Hydration status is a key factor in the ability of the human body to function efficiently in a hot thermal climate. The total body water mass is approximately 60% (Parsons, 2003); this level constantly varies when work is undertaken in hot environments. Fluids are lost via several routes, including sweating, evaporation from the respiratory tract, and excretion. Rehydration of lost fluids is integral to effective management of work in these adverse conditions. Ensuring that employees maintain a sufficient water intake to counter losses

associated with sweat evaporation in hot environments has always been an issue. Consistently, research has shown that relying purely on the thirst mechanism to maintain fluid volumes is ineffective, and often results in involuntary dehydrationø(e.g. Greenleaf, 1982; Sawka, 1988). Many studies have been conducted to identify an ideal replacement fluid that is palatable and provides a rapid rate of absorption into the body (see, for example, Murray, 2005). Palatability should not be underestimated; colour, odour, temperature and taste are critical to palatability and intake (e.g. Greenleaf, 1992; Holmes, n.d.).

Taken in frequent small amounts, water is the simplest and most readily absorbed fluid: õResearch has established that fluid requirements during work in the heat that lasts less than 90 minutes can be met by drinking adequate amounts of plain waterö (Nevola, 1998; Nevola, Staerck & Harrison, 2005). Particularly in the case of an acclimatised individual, the salt levels lost are usually replaced by the salt content of the average diet.

For hot-environment work of 90-240 minutes duration, consideration should be given to the inclusion of fluid that contains some form of carbohydrate additive of less than 7% concentration. For work periods exceeding 240 minutes, fluids should also be supplemented with electrolytes, including sodium (~20-30 mmol/L) and trace potassium (~5 mmol/L) to replace those lost in sweat. There are numerous commercial electrolyte-replacement drinks available with varying levels of sodium, potassium, carbohydrates and other additives. Their suitability should be assessed in light of the requirements of the specific situation. Alcohol and caffeine drinks (such as tea, coffee, energy drinks and some colas) should be avoided; these can have a diuretic effect (increased urine production) and hence increase fluid loss, leading to dehydration and hindering rehydration before and after work (e.g. Brake, Donoghue & Bates, 1998; OHSCO, 2009; SDA, 2009.)

Medication can also impact on the body ability to manage heat stress and should be taken into consideration. Obviously diuretics will impact on the fluid balance whilst antihistamines may inhibit the sweating process, and some anti-inflammatories may interfere with thermoregulation. Medications which can affect blood pressure, i.e. beta blockers, may also lower heat tolerance as they can reduce the cooling ability of an individual by preventing dilation of the blood vessels in the skin.⁴

4.2 Acute health effects

Initial symptoms of heat strain ó deterioration of concentration and fine motor skills and, in some cases, exhaustion ó may start to manifest within a rise in core body temperature of 2°C. Heat stroke can begin when core body temperature reaches 40°C with death possible from 42°C (Leithead and Lind 1964). Indeed, the World Health Organization (WHO,

_

⁴ Tables detailing responses to specific drugs in relation to heat and cold exposures can be found in BOHS Technical Guide No 12 (BOHS. 1996).

1969) recommended that a core temperature of 38°C not be exceeded during heavy labour. Heat illnesses can range from prickly heat, heat cramps, heat syncope (fainting) and dehydration to the more serious heat exhaustion and heat stroke. There is large variability in the response of individuals to hot conditions. Some individuals may be seriously affected by a body temperature of less than 39°C, whereas there have been documented instances of body temperatures exceeding 40°C without significant impairment of function (Hanson et al., 2000).

4.3 Chronic health effects

Chronic heat illnesses can be grouped into those that occur:

- Following an acute heat illness, e.g. reduced heat tolerance, muscle soreness after heat cramp, chronic heat exhaustion after acute heat exhaustion, cellular damage in organs after heat stroke
- Following working in hot conditions for weeks, months or years, e.g. chronic heat exhaustion symptoms such as headache, sleep disturbance, tachycardia and nausea after several months in a hot job; hypertension, reduced libido, myocardial damage and hypochromemia (low levels of chloride) after many years in a hot job
- Among people living in hot regions of the world, e.g. frequent skin diseases, sleep disturbance, psychoneurosis (tropical lethargy) and anhidrotic heat exhaustion in the tropics; kidney stones and anhidrotic heat exhaustion in the desert (Dukes-Dobos, 1981).

Some kidney, liver, heart, digestive system, central nervous system, skin conditions and alterations in gestation length have been linked to long-term heat exposure (see, for example, Porter, Thomas & Whitman, 1999); however, the evidence to support these links is inconclusive.

4.4 Other hazards

Because heat stress can contribute to fatigue, its control is of particular importance in tasks of a critical safety nature (see, for example, WorkSafe Victoria, 2009). Furthermore, higher summer temperatures may be partially responsible for increased accident and injury incidence among workers in the mining and munitions industries and physically active individuals (Chrenko, 1974; Knapik et al., 2002).

4.5 Risk assessment and assessing the thermal environment

Six basic factors can be used to define an individual thermal environment:

Environmental factors:

• Air temperature

- Radiant temperature
- Air velocity
- Humidity

Personal factors:

- Clothing insulation
- Metabolic heat (HSE, n.d.).

These factors are considered in a three-tiered approach to assessment of heat exposure that has been designed to be applicable to a range of scenarios where the level applied is dependent on the severity and complexity of the situation (DiCorleto, 1998). The risk-assessment tiers require increasing levels of technical expertise. Whilst a Level 1 assessment could be undertaken by a variety of individuals with minimal or no technical skills, a Level 2 assessment requires a higher level of skill such as that of an OHS professional and in some cases specialist skills. A Level 3 assessment should be restricted to those with specialist knowledge and skills such as occupational physicians, experienced occupational hygienists or physiologists.

4.5.1 Level 1: Basic assessment

The first, or basic, level of thermal risk assessment as detailed in the Australian Institute of Occupational Hygienists Heat Stress Standard (Di Corleto, Coles & Firth, 2003) is a qualitative assessment that does not require specific technical skills in its application or interpretation. It was developed for use by frontline workers to assist them to better understand the mechanisms and impacts of thermal assessments. Level 1 assessment involves a series of questions relating to parameters that will impact the individual@s heat stress; responses are assigned a numerical value and weighted according to potential impact on the thermal load. The final numerical value is compared to a predetermined scale that rates the overall heat stress potential.⁵ Asking the assessor to rate specific parameters impacting on thermal stress highlights the many aspects of the work environment that need to be considered (i.e. not just a single dry bulb temperature). Undertaken as part of a walk-through survey with the worker, it can be a useful and powerful tool in training and education. In the original version of the Basic Thermal Assessment developed by the author there was no actual measurement required; use of the Wet Bulb Globe Thermometer (WBGT) temperature in the equation was added to supplement the subjective and qualitative nature of the assessment with some quantification.

More recently, a number of similar basic risk-assessment programs have been developed that include additional parameters such as urine specific gravity, hydration levels and decision matrices (Bates, Lindars & Hawkins, 2008).

_

⁵ See Appendix 1: Basic Thermal Risk Assessment

4.5.2 Level 2: Thermal assessment using a heat stress index

Level 2 assessment takes a more quantitative approach requiring the measurement of several environmental and personal parameters, such as dry bulb and globe temperatures, relative humidity and air velocity, and estimation of metabolic work load and clothing insulation. These parameters are used in conjunction with a heat stress index to determine allowable exposure times. Predicted Heat Strain (PHS) or Thermal Work Limit (TWL) ó the so-called \pm ational indicesøó are normally based on the human heat balance equation (see Parsons, 2003), and attempt to model various important physiological parameters that indicate heat strain. The PHS and TWL indices are intended to predict the risk of heat disorders from climate conditions (ISO, 1995) and average metabolic work rate (ISO, 2004a), using predicted responses of the body such as sweating and elevated core temperature. To extend the usefulness of the indices, the thermal characteristics (i.e. insulation effect) of a variety of protective clothing combinations have been included in the calculation (Barker, Kini & Bernard, 1999). The indices assume that light clothing is worn (e.g. cotton clothing or cotton/polyester blends), and that the body responds similarly for all persons working under the same conditions. The WBGT index ó with its simple calculation and quick result ó was developed for ease of use in an industrial setting; it provides a compromise between a precise index and the need for a fast assessment. Therefore, it is best used to determine whether a problem exists by identifying whether reference values are exceeded. If this occurs, the more advanced PHS or TWL should be used to provide a more accurate estimation of heat stress (Bethea et al., 2002).

Widely used by the UK and European mining industry and by some underground mines in Australia, Basic Effective Temperature (BET) is a subjective thermal or empirically based index that combines dry bulb temperature, aspirated (psychometric) wet bulb temperature and air velocity, and is read from specially constructed nomograms. A code of practice for working in hot and humid conditions in coalmines has been developed, wherein BET limits are provided (Hanson & Graveling, 1997).

When using the WBGT, TWL or PHS indices as limiting values, the limits are only appropriate for workers who:

- Have been screened for intolerance to heat, are in good health and are fit for the activity being considered
- Have been properly instructed in the details of their work tasks and the potential effects and signs and symptoms of heat stress
- Are able to self pace their work
- Are under some degree of supervision (minimally a buddy system)
- Are not wearing clothing that restricts sweat evaporation or heat loss.

Indices should only be used as guidelines and not as safe/unsafe limits as no single index can accurately account for all the variables associated with heat stress assessment.

Different thermal indices are suitable for different thermal and work conditions, and all have some limitations in terms of their ability to predict human response to the environment. The generalist OHS professional should be aware of these indices, their application and limitations and when specialist advice may be required as part of the assessment. Appendix 1 outlines the AIOH Thermal Risk Assessment Guide suitable for use at Level 2.

4.5.3 Level 3: Physiological monitoring

Where allowable exposure time determined by use of a rational heat stress index (e.g. PHS or TWL) is less than 30 minutes or there is a high level of personal protective equipment (PPE), there should be some form of physiological monitoring (ISO, 2001; Di Corleto, 1998). PPE clothing inhibits evaporation by producing a humid microclimate and diminishes the cooling effect of the evaporation that does take place (Nunnely, 1989).

Physiological monitoring is based on an individual reaction to the thermal stress to which they are being exposed. These direct measurements take into account the variables (e.g. age, fitness) for which assumptions are made in the Level 2 assessment that utilises indices. Physiological assessment provides a more accurate result and a greater level of confidence as to the impact on the individual regardless of the conditions and, importantly, includes the impact of PPE.

Urine specific gravity

Hydration status can be assessed by measuring urine specific gravity (USG), which is õthe mass of a urine sample compared with the mass of an equal volume of waterö (Armstrong, 2003, p. 224). The US National Athletic Trainersø Association (NATA) recommended that: õFluid replacement should approximate sweat and urine losses, and at least maintain hydration at less than 2% body weight reductionö (Casa et al., 2000). Also, NATA stated that a USG of greater than 1.020 would reflect dehydration as indicated in Table 3.

Table 1: National Athletic Trainers Association index of hydration status (adapted from Casa et al., 2000)

	Body Weight Loss (%)	Urine Specific Gravity
Well hydrated	<1	<1.010
Minimal dehydration	1 - 3	1.010 . 1.020
Significant dehydration	3 - 5	1.021 . 1.030
Severe dehydration	> 5	> 1.030

Research confirmed that a USG of 1.020 is the most appropriate limit value indicating dehydration (Sawka et al., 2007; Cheuvront & Sawka, 2005). At this value, a body weight loss of 3% fluid or more would be expected. Generally, a loss of 263% body fluid is regarded as the level at which there is an increased perceived effort, increased risk of heat illness, and reduced physical and cognitive performance (Hunt, Stewart & Parker, 2009). There are several USG monitoring methods; however, the more accurate and widespread involves use of a refractometer, either electronic or optical hand-held. Some organisations are utilising the more convenient urine dipsticks for self-testing by employees.

Urine production and colour

The level of urine production decreases as dehydration increases; urine levels of less than approximately 250 mL produced twice daily indicate dehydration. Urine colour is a useful guide for tracking levels of dehydration (Armstrong et al., 1998). Colour intensifies as the urine concentrates with a dark yellow colour indicating severe dehydration through to a pale straw colour when hydrated. However, colour may be affected by illness, medications and vitamin supplements.

4.6 Legislation and standards

The draft national model *Work Health and Safety Regulations* (Safe Work Australia, 2010) require that õa person conducting a business or undertaking (PCBU) must, so far as is reasonably practicable, ensure that: ...workers exposed to extremes of heat or cold at the workplace are able to carry out work without risk to health and safetyö (WHSR s 3.1).

Historically in Australia, the various legislative frameworks, federal and state, did not specifically regulate exposure levels for heat stress. In New South Wales, clauses 47 and 48 of the *Occupational Health and Safety Regulation 2001* (Government of NSW, 2001) outline provisions such as shelter, ventilation and consideration of work rest regimes; other states referred to the õresponsibility of employers to ensure they provide a safe and healthy work environmentö or general duty of care. Generally, all states provide guidance in the form of either compliance codes (e.g. WorkCover NSW, 2001; industry-specific guides; or guidance publications and newsletters). An example of an exception was in Queensland mines. The *Mining and Quarrying Safety and Health Regulation 2001* (Queensland Government, 2011a) refers to specific values:

The site senior executive must ensure the mine has a system for managing the risk to persons from heat in places at the mine where the wet bulb temperature exceeds 27°C [and that] a person is not exposed to a wet bulb temperature exceeding 34°C at the mine unless the person is (a) engaged in work to reduce the temperatureí or (b) a mines rescue member carrying out training or emergency response under procedures documented in the system; or (c) being evacuated in an emergency (MQSHR 143).

OHS Body of Knowledge Page 12 of 29 Physical Hazards: Thermal Environment April, 2012 Furthermore, under the equivalent Queensland coal mining regulation (Queensland Government, 2011b, regs 369-370), 29.4°C is the stipulated maximum temperature for working at an underground coal mine, with the effective temperature to be calculated by the mine OHS management system.

In the UK mines, work tends to continue to an informal limit of 27°C BET, when action to reduce risk of heat strain is particularly required. The Australian Institute of Occupational HygienistsøHeat Stress Standard (Di Corleto, Coles & Firth, 2003) does not refer to specific environmental exposure limits.

Both the American Conference of Industrial Hygienists (ACGIH, 2010) and the International Organization for Standardization (ISO, 2004b) have published physiological limits. The ACGIH (2011) stipulated that exposure to environmentally or activity-induced heat stress must be discontinued in the following circumstances:

- Sustained (several minutes) heart rate in excess of 180 beats per minute (BPM) minus the individual age in years (e.g. 180 ó age), for individuals with assessed normal cardiac performance; or
- Body core temperature greater than 38.5°C for medically selected and acclimatised personnel; or greater than 38°C in unselected, unacclimatised workers; or
- When there are complaints of sudden and severe fatigue, nausea, dizziness or light-headedness; or
- A worker's recovery heart rate at one minute after a peak work effort is greater than 120 bpm,

An individual may be at greater risk of heat related disorders if:

- A worker experiences profuse and prolonged sweating over hours and may not be able to adequately replenish fluids; or
- In conditions of regular daily exposure to the stress, 24-hour urinary sodium excretion is less than 50 mmoles.

The ACGIHs overriding advice is to never ignore any signs or symptoms that may be apparent in relation to heat related exposures. *ISO 9886:2004 Ergonomics – Evaluation of Thermal Strain by Physiological Measurements* (ISO, 2004b) suggested that exposure to environmentally or activity-induced heat stress must also be discontinued when :Heart Rate Limit = 185 \(\phi \) 0.65A\(\phi \) (where A = age in years) is reached. As individual variability can range up to 20 bpm from this average, this level could present a risk for some individuals. Where there is uncertainty, the sustained heart rate over a work period should not exceed a lower limit of HRL, sustained = 180 \(\phi \) age. No matter which limiting values are used, interpretation requires discussion with the workers affected and may require assessment by a specialist occupational hygienist especially where there are extended shifts.

4.7 Controls

Various factors must be addressed in managing and minimising the risk associated with working in hot environments; no one control will be effective. A range of controls is given below.

Elimination/substitution

- Work should be scheduled to avoid the hottest part of the day.
- Design of buildings housing hot processes should where possible incorporate good air flow through positioning of windows, shutters and roof design to encourage ÷chimney effectsøto help dissipate the heat from the structure.
- Reflective or light-coloured external cladding and roofing can reduce internal temperatures.

Engineering

- Air circulation should be sufficient to allow evaporation of sweat (the body principal cooling mechanism). In high humidity more air needs to be moved, hence higher air velocity is required. This can be facilitated by fans or, in extreme cases, cooled air from ÷chillerøunits.
- Barriers may be useful where radiated heat from a process is a problem. Barriers
 may be highly reflective surfaces such as aluminised sheeting or even tarpaulins.
 Wherever practical, hot pipes or ductwork should be lagged or insulated to prevent
 the addition of heat to the work environment.

Administrative controls

- Ready access to cool palatable drinking water is a basic necessity.
- A clean cool area for employees to rest and recuperate may be important. Whilst resting in the work environment can provide some relief for the worker, the level of recovery is much quicker and more efficient in an air-conditioned environment. These need not be elaborate structures; basic inexpensive portable enclosed structures with an air conditioner, water supply and seating have been found to be successful in a variety of environments. For field teams with high mobility, even a simple shade structure readily available from hardware stores or large umbrellas can provide relief from solar radiation.
- Work-rest regimes are sometimes necessary where engineering controls are insufficient to protect the individual. Heat stress indices, such as WBGT, PHS or TWL (section 4.5), assist in determining duration of work and rest periods.
- Training workers to identify symptoms and the potential onset of heat-related illness as part of the ÷buddy system.ø
- Self-determination or pacing of the work to meet the conditions.

Personal protective equipment

PPE such as cooling vests with either -phase change@cooling inserts (not ice) or
vortex tube air cooling may be used in some situations, particularly when a cooling
source is required when supplied air respirators are used. Ice or chilled water can
result in contraction of the blood vessels, reducing the cooling effect of the
garment, so tend not to be used

5 Understanding the impact of cold environments

While not as common as exposure to high temperatures in industrial situations in Australia, exposure to low temperatures does occur and can result in significant injury and illness if not properly addressed. Cold exposure can occur in cold-storage areas associated with the freezing of food products, in meat-processing plants, in low-temperature exterior climates (particularly in the elevated mountain regions in winter) and in extreme scenarios in Antarctic regions. Cold stress refers to endurance of low-temperature conditions sufficient in duration and intensity to result in an alteration or adaptation of internal systems (Tillman, 2007). The exposure may be general, affecting the whole body, or localised involving only extremities or the face.

It is important to ensure that the core body temperature does not drop below 36°C at which point shivering becomes uncontrollable, vasoconstriction occurs and the heart rate can decrease. In severe cases, prolonged low body temperatures can result in death. Three key components play major roles in the impact of cold environments on the individual:

- Low temperature
- Wind speed
- Wetness.

The varying combination of these factors can determine the severity of the work environment (Figure 1).

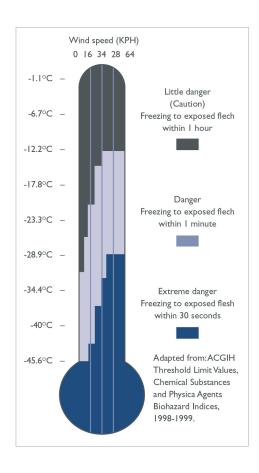


Figure 1: Combined effect of temperature and wind speed on cold stress (adapted from OSHA, 1998)

5.1 Health effects

The impact of exposure to cold environment can range from local damage to body parts (e.g. hands, face or feet) to general hypothermia from exposure to cold air and/or immersion risks in cold water. In *Best Practice – Working Safely in the Heat and Cold*, the Government of Alberta provided the following details about the health effects of cold exposure (Work Safe Alberta, 2009, p. 14):

Chilblains are a mild cold injury caused by prolonged and repeated exposure for several hours to air temperatures from the freezing point (0°C) to as high as 16°C. Where the skin is affected, there will be redness, swelling, tingling, and pain.

Immersion foot occurs in individuals whose feet have been wet, but not freezing cold, for days or weeks. It can occur at temperatures up to 10°C. The primary injury is to nerve and muscle tissue. Symptoms include tingling and numbness; itching, pain, swelling of the legs, feet, or hands; or blisters may develop. The skin may be red initially and turn to blue or purple as the injury progresses. In severe cases, gangrene may develop.

Trenchfoot (or hand) is "wet cold disease" resulting from prolonged exposure in a damp or wet environment from the freezing point to about 10° C. Depending on the temperature, symptoms may begin within several hours to many days, but the average is three days.

Frostnip is the mildest form of a freezing cold injury. It occurs when ear lobes, noses, cheeks, fingers, or toes are exposed to the cold and the top layers of the skin freeze. The skin of the affected area turns white and it may feel numb. The top layer of skin feels hard but the deeper tissue still feels normal (soft). The top layer of skin sometimes peels off the affected area.

Frostbite is caused by exposure to extreme cold or by contact with extremely cold objects (e.g. metal). It may also occur at normal temperatures from contact with cooled or compressed gases. Frostbite occurs when tissue temperature falls below freezing (0°C), or when blood flow is obstructed under cold conditions. Blood vessels may be severely and permanently damaged, and blood circulation may stop in the affected tissue. In mild cases, the symptoms include inflammation (redness and swelling) of the skin in patches accompanied by slight pain. In severe cases, tissue damage without pain, or burning or prickling sensations and blistering can happen. Frostbitten skin is highly susceptible to infection, and gangrene (local death of soft tissues due to loss of blood supply) may develop.

Hypothermia occurs when the body is unable to compensate for its heat loss and the body's core temperature starts to fall. You first feel cold followed by pain in exposed parts of the body. As the body's core temperature continues to drop, the feeling of cold and pain starts to diminish because of increasing numbness (loss of sensation). If no pain can be felt, serious injury can occur without the victim noticing it. As the body continues to cool, muscular weakness, an inability to think clearly, and drowsiness are experienced. This condition usually occurs when the body's internal or core temperature falls below 33°C. Additional symptoms include shivering coming to a stop, diminished consciousness and dilated pupils. When the core temperature reaches 27°C, coma (profound unconsciousness) sets in.

Hypothermia is a condition that results when the body's core temperature falls below 35°C. Warning signs can include nausea, fatigue, irritability or euphoria. An affected person may not fully realise the danger of the situation because the progressive cooling of the body can cause mental confusion and impaired judgement. If untreated, hypothermia may result in death (Weinberg, 1993). Alcohol should be avoided as it can cause a lowering of the blood sugar level and consequently rapid body cooling in an exhausted victim. (BOHS. 1996)

5.2 Legislation and standards

As with hot environments, the draft national model regulations (Safe Work Australia, 2010) [WHSR s 3.1(f)] require that õa person conducting a business or undertaking (PCBU) must, so far as is reasonably practicable, ensure that: ...workers exposed to extremes of heat or cold at the workplace are able to carry out work without risk to health and safetyö.

The different state OHS regulators provide relevant codes and guidelines; for example, Worksafe Victoria (2008) produced a handbook targeting cold storage facilities and WorkCover NSW (2001) devised the *Work in Hot or Cold Environments: Code of Practice 2001*. Also, many industry-specific guides and fact sheets provide practical and useful information.

OHS Body of Knowledge Page 17 of 29 Physical Hazards: Thermal Environment April, 2012

5.3 Controls

Controls for working in cold climates tend to focus on administrative controls and PPE. Some examples of controls are listed below.

Elimination/substitution

- Warm air jets, radiant heaters and contact warm plates have been used in some situations.
- Where possible undertake tasks in the warmest part of the day.

Engineering

• Tools with metal handles should be covered by thermal insulating material when used in sub-zero climates.

Administrative controls

- Appropriate training of employees in relation to cold exposure.
- Work/rest regimes in warm shelters can protect employees working in cold environments with an equivalent chill temperature below -7°C (BOHS, 1996).
- For work locations such as cold stores or where the temperature is below -12°C constant supervision such as the use of a :buddy systemøshould be utilised.
- Work output should be controlled to minimise heavy sweating; where this cannot be avoided, individuals should be encouraged to take rest breaks to allow them to change into dry clothes⁶.

Personal protective equipment and increasing resistance

- Selection of suitable clothing that can be layered to adjust the changing environmental conditions; protection of extremities with hats and gloves.
- Cold injuries to the extremities are the most common problem in low temperature climates; where the tasks require manipulation or adjustment of fine components it is important to ensure that workers hands are protected and kept warm, but also that tactile senses are not impaired and task performance is not diminished.
- Drink warm, sweet beverages preferably caffeine free and avoid alcohol.
- Consume warm, high-calorie foods (e.g. pasta).

6 Contact injuries

Within the occupational environment there are numerous thermal sources (both hot and cold) that can result in discomfort or burns to the skin. For example, the draft model regulations (Safe Work Australia, 2010) specifically refer to:

-

⁶ For very low temperatures (below -26°C) refer to the work/warm up schedule in ACGIH (2010) adapted from the Occupational Health and Safety Division, Saskatchewan Department of Labour

Guarding and insulation from heat and cold

The person with management or control of plant at a workplace must ensure, so far as is reasonably practicable, that any pipe or other part of the plant associated with heat or cold is guarded or insulated so that the plant is without risks to the health and safety of any person. (WHSR s 5.1.30)

Thermal contact injuries may range from superficial burns that do not penetrate the outer layer of skin or epidermis, through partial-thickness burns that penetrate the outer layer but not the inner layer of skin or dermis to full-thickness burns that penetrate the skin and damage the underlying tissue below (Parsons. 2003) (see, for example, Figure 2)

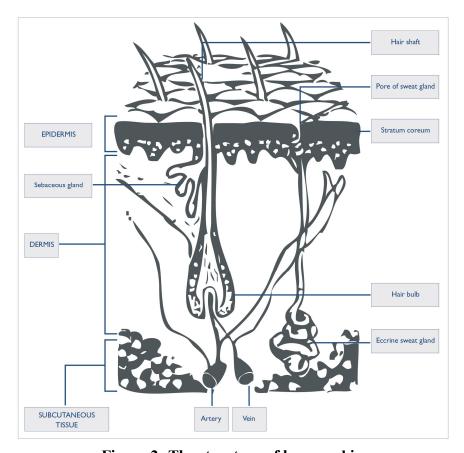


Figure 2: The structure of human skin

While the international standard *ISO 13732–1:2006 Ergonomics of the Thermal Environment – Methods for the Assessment of Human Responses to Contact with Surfaces – Part 1: Hot Surfaces* (ISO, 2006) provides a comprehensive risk-assessment process, a simplified version for contact burns when working with hot machinery is provided below.

1. Through consultation with the operator/s, identify contact points, touchable surfaces and length of contact periods.

- 2. Use task analysis and observation to determine worker behaviour under normal and extreme use of the machine.
- 3. Establish conditions that would produce maximum temperatures of touchable parts of the equipment (not normally heated as an integral part of the functioning of the machine).
- 4. Undertake surface temperature measurements while the machine is operating.
- 5. Determine the burn threshold value (i.e. the temperature which is the boundary between no burn and a superficial burn). Multiple thresholds may need to be utilised where different materials are involved.
- 6. Compare the measured results with the burn thresholds.

Also, there is potential for injury resulting from short or prolonged contact with cold surfaces. Curves of surface temperature and exposure time are provided for touching and gripping of cold surfaces for a variety of materials including aluminium, stone, nylon and steel in Youle and Parsons (2009) and in *ISO 13732–1:2005 Ergonomics of the Thermal Environment – Methods for the Assessment of Human Responses to Contact with Surfaces – Part 3: Cold Surfaces* (ISO, 2005).

7 Implications for OHS practice

In general, much of the assessment and determination of controls in relation to the thermal environment can be undertaken by the OHS generalist. Many of these controls are not complicated and are relatively easily implemented, in fact the simpler the better. In some cases there may be required a combination of controls from the different levels of the hierarchy of controls, i.e. engineering and administrative. It is also important to note that one of the key factors associated with the management of the thermal environment is a good understanding of the hazards, the controls available and the symptoms as they present early in the exposure. It is thus imperative that individuals potentially exposed be provided with the appropriate training.

There are some instances where the exposure may not have been adequately characterised, hence making the selection of controls more difficult or the exposures are so extreme that they are not easy to determine. In such situations the utilisation of professionals with experience in the monitoring and assessment of thermal environments such as the occupational hygienists or others knowledgeable in the application of physiological monitoring and assessment such as occupational physicians should be approached to assist.

8 Summary

After brief consideration of the historical context and the extent of the problems associated with occupational exposure to extreme hot and cold environments, this chapter focused on

OHS Body of Knowledge Page 20 of 29 Physical Hazards: Thermal Environment April, 2012 provision of information about the thermal environment that is likely to be relevant to the generalist OHS professional role. It elucidated the health effects of hot and cold environments, addressed risk assessment and presented control options. Given the relevance of heat exposure to Australian working conditions, this information was supplemented with a three-tiered approach to the assessment of heat exposure. Finally, the implications for OHS practice were considered.

Key thinkers and useful references

Ken Parsons, Thomas Bernard.

Parsons, K. (2003). Human thermal environments: The effects of hot, moderate and cold environments on human health, comfort and performance (2nd ed.). London, UK: Taylor & Francis

Leithead, C. S., Lind, A. R., (1964). Heat stress & heat disorders. F. A. Davis Company.

- ISO (International Organization for Standardization). (1995). *ISO 9920:1995 Ergonomics of the Thermal Environment Estimation of the Thermal Insulation and Evaporative Resistance of a Clothing Ensemble*. Geneva: ISO.
- ISO (International Organization for Standardization). (2001). ISO 12894:2001 Ergonomics of the Thermal Environment Medical Supervision of Individuals Exposed to Extreme Hot or Cold Environments. Geneva: ISO.
- ISO (International Organization for Standardization). (2004a). ISO 8996:2004 Ergonomics of the Thermal Environment Determination of Metabolic Rate. Geneva: ISO.
- ISO (International Organization for Standardization). (2004b). *ISO 9886:2004 Ergonomics Evaluation of Thermal Strain by Physiological Measurements*. Geneva: ISO.
- ISO (International Organization for Standardization). (2005). ISO 13732–1:2005 Ergonomics of the Thermal Environment – Methods for the Assessment of Human Responses to Contact with Surfaces – Part 3: Cold Surfaces. Geneva, ISO.
- ISO (International Organization for Standardization). (2006). ISO 13732–1:2006 Ergonomics of the Thermal Environment – Methods for the Assessment of Human Responses to Contact with Surfaces – Part 1: Hot Surfaces. Geneva, ISO.

References

ACGIH (American Conference of Governmental Industrial Hygienists). (2010). *Threshold Limit Values for Chemical Substances and Physical Agents and Biological Exposure Indices*. Cincinnati: ACGIH Signature Publications.

OHS Body of Knowledge Page 21 of 29 Physical Hazards: Thermal Environment April, 2012

- Amorim, F., & Moseley, P. L. (2010). Heat shock protein and inflammation. In A. A. Asea & B. K. Pederson (Eds.), *Heat shock proteins and whole body physiology* (pp. 576 84). Dordrecht/Heidelberg/London/New York: Springer.
- ANSI/ASHRAE (American National Standards Institute/American Society of Heating, Refrigeration and Air-conditioning Engineers). (2010). ANSI/ASHRAE Standard 55–2004 Thermal Environmental Conditions for Human Occupancy. Atlanta, GA: ASHREA.
- Armstrong, L. E. (Ed.). (2003). Exertional heat illnesses. Champaign, IL: Human Kinetics.
- Armstrong, L. E., Soto, J. A., Hacker, F. T., Casa, D. J., Kavouras, S. A., & Maresh, C. M. (1998). Urinary indices during dehydration, exercise, and rehydration. *International Journal of Sport Nutrition*, 8(4), 3456355.
- Barker, D. W., Kini, S., & Bernard, T. E. (1999). Thermal characteristics of clothing ensembles for use in heat stress analysis. *American Industrial Hygiene Association Journal*, 60(1), 32637.
- Bass, D. E. (1963). Thermoregulatory and circulatory adjustments during acclimatization to heat in man. In J. D. Hardy (Ed.), *Temperature: Its measurement and control in science and industry* (pp. 299–305). New York, NY: Reinhold Publishing.
- Bates, G. P., Lindars, E., & Hawkins, B. (2008). *Thermal stress risk assessment and management tools* [Poster Presentation]. AIOH Conference, Perth.
- Bethea, D., & Parsons, K. C. (2002). *The Development of a Practical Heat Stress Assessment Methodology for Use in UK Industry* (Research Report 008). HSE. Retrieved from http://www.hse.gov.uk/research/rrpdf/rr008.pdf
- Blagden, C., (1775). *Experiments and Observations in an Heated Room*. Philosophical Transactions (1683-1775), Vol. 65, pp. 111-123.
- BOHS (British Occupational Hygiene Society). (1996). *The Thermal Environment* (2nd ed.) (Technical Guide No. 12). Retrieved from http://www.bohs.org/uploadedFiles/Library/Publications/TG12(1).pdf
- Brake, R. (2001). Fluid consumption, sweat rates and hydration status of thermally-stressed underground miners and the implications for heat illness and shortened shifts. In *Proceedings of the Queensland Mining Industry Health & Safety Conference*. Retrieved from http://www.qrc.org.au/conference/_dbase_upl/2001_spk024_brake.pdf
- Brake, D. J., Donoghue, M. D., & Bates, G. P. (1998). A new generation of health and safety protocols for working in heat. In *Proceedings of Queensland Mining Industry Health and Safety Conference: New Opportunities* (pp. 91–100). Yeppoon, Queensland.

- Bricknell, M. C. (1996). Heat illness in the army in Cyprus. *Occupational Medicine*, 46(4), 304–312.
- Casa, D. J., Armstrong, L. E., Hillman, S. K., Montain, S. J., Reiff, R. V., Rich, B. S., et al. (2000). National Athletic Trainersø Association position statement: Fluid replacement for athletes. *Journal of Athletic Training*, 35(2), 212–224.
- CCOHS (Canadian Centre for Occupational Health and Safety). (2008). Hot environments ó health effects. Retrieved March 11, 2011, from http://www.ccohs.ca/oshanswers/phys_agents/heat_health.html
- CDC (US Centers for Disease Control and Prevention). (2011a). Heat stress. Retrieved from http://www.cdc.gov/niosh/topics/heatstress/
- CDC (US Centers for Disease Control and Prevention). (2011b). Cold stress. Retrieved from http://www.cdc.gov/niosh/topics/coldstress/
- Cheuvront, S. N, & Sawka, M. N. (2005). Hydration assessment of athletes. *Sports Science Exchange* 97, 18(2), 1–12.
- Chrenko, F. A., (1974). (Ed.) *Bedfords basic principles of Ventilation and Heating*, H.K. Lewis, London
- Di Corleto, R. (1998). Heat stress monitoring in the Queensland environment: A climatic conundrum. In *Proceedings of the 6th Annual Conference of the Safety Institute of Australia (Queensland Branch) and the Division of Workplace Health and Safety: Managing the Future* (pp. 131–135). Gold Coast.
- Di Corleto, R., Coles, G. & Firth, I. (2003). *Heat Stress Standard & Documentation Developed for Use in the Australian Environment*. Tullamarine, VIC: Australian Institute of Occupational Hygienists.
- Donoghue, A. M., Sinclair, M. J., & Bates, G. P. (2000). Heat exhaustion in a deep underground metalliferous mine. *Occupational & Environmental Medicine*, *57*(3), 1656174.
- Dukes-Dobos, F. N. (1981). Hazards of heat exposure: A review. *Scandinavian Journal of Work, Environment & Health*, 7(2), 73–83.
- Givens, P., & Reiss, M. (2002). *Human biology and health studies* (2nd ed.). Cheltenham: Nelson Thomas.
- Goldman, R. E. (2001). Introduction to heat-related problems in military operations. In K. B. Pandolf & R. E. Burr (Eds.) (Section Ed. C. B. Wenger), *Medical aspects of harsh environments* (Vol. 1) (pp. 3649). Washington, DC: Office of the Surgeon General at

- TMM Publications, Borden Institute. Retrieved from http://www.bordeninstitute.army.mil/published_volumes/harshEnv1/harshenv1.htm
- Greenleaf, J. E. (1982). Dehydration-induced drinking in humans. *Federation Proceedings*, 41(9), 2509–2514.
- Greenleaf, J. E. (1992). Problem: Thirst, drinking behaviour, and involuntary dehydration. *Medicine & Science in Sports & Exercise*, 24(6), 6456656.
- Hanson, M. A., Cowie, H. A., George, J. P., Graham, M. K., Graveling, R. A., & Hutchison, P. A. (2000). *Physiological Monitoring of Heat Stress in UK Coal Mines* (Research Report TM/00/05). Edinburgh: Institute of Occupational Medicine. Retrieved from http://www.iom-world.org/pubs/IOM_TM0005.pdf
- Hanson, M. A., & Graveling, R. A. (1997). *Development of a Code of Practice for Work in Hot and Humid Conditions in Coal Mines* (Research Report TM 97/06). Edinburgh: Institute of Occupational Medicine.
- Holmer, I. (1998). Cold indices and standards. In *ILO Encyclopedia of Occupational Health and Safety* (Vol. 2, Ch. 42). Retrieved from http://www.ilo.org/safework_bookshelf/english?content&nd=857170524
- Holmes, N. (n.d.). Fluid requirements of endurance athletes. Retrieved from http://pointhealth.com.au/pdf/FLUID%20REQUIREMENTS%20OF%20ENDURANCE%20 ATHLETES.pdf
- Houghton, F. C., and Yagloglou, C. P., (1924). *Cooling effect on human beings produced by various air velocities*. Journal of ASHVE, 30, 193.
- HSE (UK Health and Safety Executive). (n.d.). The six basic factors. Retrieved from http://www.hse.gov.uk/temperature/thermal/factors.htm
- Hunt, A. P. (2011). *Heat strain, hydration status, and symptoms of heat illness in surface mine workers*. Doctoral dissertation. Queensland University of Technology, Brisbane, QLD. Retrieved from http://eprints.qut.edu.au/44039/1/Andrew_Hunt_Thesis.pdf
- Hunt, A. P., Stewart, I. B., & Parker, T. W. (2009). Dehydration is a health and safety concern for surface mine workers. In *Proceedings of the International Conference on Environmental Ergonomics, Boston USA, August 2009*. Retrieved from http://www.lboro.ac.uk/departments/lds/groups/EEC/ICEE/textsearch/09articles/Andrew%20Hunt.pdf
- ISO (International Organization for Standardization). (1995). *ISO 9920:1995 Ergonomics* of the Thermal Environment Estimation of the Thermal Insulation and Evaporative Resistance of a Clothing Ensemble. Geneva: ISO.

- ISO (International Organization for Standardization). (2001). ISO 12894:2001 Ergonomics of the Thermal Environment Medical Supervision of Individuals Exposed to Extreme Hot or Cold Environments. Geneva: ISO.
- ISO (International Organization for Standardization). (2004a). ISO 8996:2004 Ergonomics of the Thermal Environment Determination of Metabolic Rate. Geneva: ISO.
- ISO (International Organization for Standardization). (2004b). *ISO 9886:2004 Ergonomics Evaluation of Thermal Strain by Physiological Measurements*. Geneva: ISO.
- ISO (International Organization for Standardization). (2005). ISO 13732–1:2005 Ergonomics of the Thermal Environment – Methods for the Assessment of Human Responses to Contact with Surfaces – Part 3: Cold Surfaces. Geneva, ISO.
- ISO (International Organization for Standardization). (2006). ISO 13732–1:2006 Ergonomics of the Thermal Environment – Methods for the Assessment of Human Responses to Contact with Surfaces – Part 1: Hot Surfaces. Geneva, ISO.
- Knapik, J. J., Canham-Chervak, M., Hauret, K., Laurin, M. J., Hoedebecke, E., Craig, S., & Montain, S. J. (2002). Seasonal variations in injury rates during US army basic combat training. *Annals of Occupational Hygiene*, *46*(1), 15–23.
- Leithead, C. S., and Lind, A. R., (1964) Heat stress and heat disorders. Philidelphia, USA; F. A. Davis Company.
- Lloyd, E. L. (1986). *Hypothermia and cold stress*. Kent, UK; Surry Hills, NSW: Croom Helm.
- Moss, K.N., (1923). Some Effects of High Air Temperatures and Muscular Exertion upon Colliers. Proceedings of the Royal Society of London. Series B, Containing Papers of a Biological Character, Vol. 95, No. 666 (Aug. 1, 1923), pp. 181-200
- Murray, B. (2005, May 20). Preventing dehydration: Sports drinks or water. Retrieved from http://www.gssiweb.com/Article_Detail.aspx?articleID=701
- Nevola, V. R. (1998). *Drinking for Optimal Performance During Military Operations in the Heat: A Guide for Commanders* (DERA/CHS/PP5/CR980062/1.0). Farnborough, UK: Defence Evaluation and Research Agency Centre for Human Sciences.
- Nevola, V. R., Staerck, J., & Harrison, M. (2005). *Commander's Guide: Fluid Intake During Military Operations in the Heat* (DSTL/CR15164). Wiltshire, UK: Defence Science and Technology Laboratory. Retrieved from http://www.mod.uk/NR/rdonlyres/44AAF17B-EF26-4144-9C1B-AC1F2AD4C1E9/0/cosrf100178.pdf

OHS Body of Knowledge Page 25 of 29 Physical Hazards: Thermal Environment April, 2012

- NSW Government. (2001). *Occupational Health and Safety Regulation 2001*. Retrieved from http://www.legislation.nsw.gov.au/fullhtml/inforce/subordleg+648+2001+cd+0+N
- Nunnely, S. A. (1989). Heat stress in protective clothing, *Scandinavian Journal of Work, Environment & Health, 15*(Suppl. 1), 52–57.
- OSHA (Occupational Safety and Health Administration). (1998). *OHSA 3156: The Cold Stress Equation*. US Department of Labour. Retrieved from http://www.osha.gov/Publications/osha3156.pdf
- OHSCO (Occupational Health and Safety Council of Ontario). (2009). *Heat Stress Awareness Guide*. Ontario: WSIB Ontario. Retrieved from http://www.csao.org/UploadFiles/news/HeatStressGuide2009.pdf
- Parsons, K. C. (1998). Assessment of heat stress and heat stress indices. In *ILO Encyclopedia of Occupational Health and Safety* (Vol. 2, Ch. 42). Retrieved from http://www.ilo.org/safework_bookshelf/english?content&nd=857170520
- Parsons, K. (2003). Human thermal environments: The effects of hot, moderate and cold environments on human health, comfort and performance (2nd ed.). London, UK: Taylor & Francis.
- Patton, B. C. (2001). Cold, casualties, and conquests: The effects of cold on warfare. In K. B. Pandolf & R. E. Burr (Eds.) (Section Ed. R. S. Pozos), *Medical aspects of harsh environments* (Vol. 1) (pp. 3136349). Washington, DC: Office of the Surgeon General at TMM Publications, Borden Institute. Retrieved from http://www.bordeninstitute.army.mil/published_volumes/harshEnv1/harshenv1.html
- Porter, K. R., Thomas, S. D., & Whitman, S. (1999). The relation of gestation length to short-term heat stress. *American Journal of Public Health*, 89(7), 1090–1092.
- Queensland Government. (2011a). *Mining and Quarrying Safety and Health Regulation* 2001. Retrieved March 11, 2011, from http://www.legislation.qld.gov.au/LEGISLTN/CURRENT/M/MiningQuaSHR01.pdf
- Queensland Government. (2011b). *Coal Mining Safety and Health Regulation 2001*. Retrieved March 11, 2011, from: http://www.legislation.qld.gov.au/LEGISLTN/CURRENT/C/CoalMinSHR01.pdf
- Safe Work Australia. (2006607). *National Online Statistics Interactive (NOSI)*. Retrieved May 14, 2011, from http://nosi.ascc.gov.au/Default.aspx
- Safe Work Australia. (2010). *Work Health and Safety Regulations* (Draft). Canberra, ACT: Safe Work Australia.

- Sawka, M. N. (1988). Body fluid responses and hypohydration during exercise-heat stress. In K. B. Pandolf, M. N. Sawka & R. R. Gonzalez (Eds.), *Human performance physiology and environmental medicine at terrestrial extremes* (pp. 2276266). Indianapolis, IN: Brown & Benchmark.
- Sawka, M. N., Burke, L. M., Eichner, E. R., Maughan, R. J., Montain, S. J., & Stachenfeld, N. S. (2007). ACSM position stand: Exercise and fluid replacement. *Medicine & Science in Sports & Exercise*, 39(2), 377–390.
- SDA (Sports Dietitians Australia). (2009). Fact sheet: Sports drinks. Retrieved March 15, 2011, from http://www.sportsdietitians.com.au/resources/upload/file/Sports%20Drinks.pdf
- Tillman, C., (2007) (Ed.) *Principles of Occupational Health & Hygiene An Introduction*. Allen & Unwin Academic.
- Vernon, H. M., & Warner, C. G., (1932). *The Influence of the Humidity of the Air on Capacity for Work at High Temperatures*. The Journal of Hygiene, Vol. 32, No. 3 (July), pp. 431-463
- Werner, J. (1993). Temperature regulation during exercise: An overview. In C. V. Gisolfi, D. R. Lamb & E. R. Nadel, *Perspectives in exercise science and sports medicine: Exercise, heat and thermal regulation* (pp. 49684). Dubuque, IA: Brown & Benchmark.
- WHO (World Health Organization). (1969). *Health Factors Involved in Working Under Conditions of Heat Stress* (Technical Report Series 412). Geneva: WHO.
- WorkCover NSW. (2001). Work in Hot or Cold Environments: Code of Practice 2001. WorkCover NSW. Retrieved from http://www.workcover.nsw.gov.au/formspublications/publications/Documents/cop_20 01_work_hot_cold%20environments_0309.pdf
- Work Safe Alberta. (2009). Best Practice ó Working Safely in the Heat and Cold (Publication No. GS006). Government of Alberta. Retrieved from http://employment.alberta.ca/documents/WHS/WHS-PUB_gs006.pdf
- WorkSafe Victoria. (2001). *Health and Safety in Shearing*. Retrieved from http://www.worksafe.vic.gov.au/wps/wcm/connect/2cc5f7804071f56fa741ffe1fb554c 40/Shearing.pdf?MOD=AJPERES
- WorkSafe Victoria. (2008). *Safe Operation of Cold Storage Facilities: A Handbook for Workplaces*. Retrieved from http://www.worksafe.vic.gov.au/wps/wcm/connect/270fbc804071f38b93bddfe1fb554c 40/Cold+Storage+Handbook.pdf?MOD=AJPERES
- WorkSafe Victoria. (2009). Fatigue in Mines: A Handbook for Earth Resources. Retrieved from

- http://www.worksafe.vic.gov.au/wps/wcm/connect/wsinternet/worksafe/home/forms+and+publications/publications/fatigue+in+mines+a+handbook+for+earth+resources
- Yaglou, C. P., and Minard, D., (1957). *Control of heat casualties at military training centers*, American Medical Assoc. Archives of Industrial Health, 16, 302-316.
- Youle, T., & Parsons, K. C. (2009). *The Thermal Environment (Technical Guide No. 12):***Addendum to the Second Edition (1996). BOHS. Retrieved from http://www.bohs.org/uploadedFiles/Library/Publications/04_TG12_Addendum_to_2nd_Edition.pdf
- Young, W. J., Breinl, A., Harris, J. J., & Osborne, W. A., (1920). *Effect of Exercise and Humid Heat upon Pulse Rate, Blood Pressure, Body Temperature, and Blood Concentration*. Proceedings of the Royal Society of London. Series B, Containing Papers of a Biological Character, Vol. 91, No. 636 (Jan. 1), pp. 111-126.

OHS Body of Knowledge Page 28 of 29 Physical Hazards: Thermal Environment April, 2012

Appendix 1: Basic Thermal Risk Assessment (informative only)

Reproduced from the Australian Institute of Occupational Hygienistsø *Heat Stress Standard & Documentation for Use in the Australian Environment* (DiCorleto, Coles & Firth, 2003)

HAZARD TYPE	Assessment Point Value			
	1	2	3	
Hot surfaces	Contact neutral	Hot on contact \square	Burn on contact	
Exposure period	< 30 min□	30 min - 2 hours □	> 2 hrs 🗖	
Confined space	No □		Yes 🗖	
Task complexity	Simple	Moderate □	Complex	
Climbing, ascending, descending	None □	Moderate \Box	Significant	
Distance from cool rest area	<50 Metres □	50-100 Metres □	>100 Metres 	
Distance from drinking water	<30 Metres □	30-50 Metres □	>50 Metres □	
Clothing (permeable)	Single layer (light) □	Single layer (mod)	Multiple layer	
Understanding of heat strain risk	Training given \square		No training given	
Air movement	Windy □	Some wind \Box	No wind □	
Resp. protection (-ve pressure)	None □	Half Face 🗖	Full Face 🗖	
Acclimatisation	Acclimatised		Unacclimatised	
SUB-TOTAL A				
	2	4	6	
Metabolic work rate*	Light 🗖	Moderate \Box	Heavy 🗖	
SUB-TOTAL B				
	1 2	3	4	
Wet Bulb Globe Temperature	< 24°C □ >24°C ≤ 2	$27^{\circ}\text{C} \square > 27^{\circ}\text{C} \le 30$	0°C □ >30°C □	
SUB-TOTAL C				
TOTAL = A plus B	Multiplied by	C =		

*Examples of Work Rate.

Light work: Sitting or standing to control machines; hand and arm work assembly or sorting of light materials.

Moderate work: Sustained hand and arm work such as hammering, handling of moderately heavy materials.

Heavy work: Pick and shovel work, continuous axe work, carrying loads up stairs.

Instructions for use of the Basic Thermal Risk Assessment

- Mark each box according to the appropriate conditions.
- When complete add up using the value at the top of the appropriate column for each mark.
- Add the sub totals of Table A & Table B and multiply with the sub-total of Table C for the final result.
- If the total is **less than 28**, the risk due to thermal conditions is low to moderate.
- If the total is **28 to 60**, there is a potential of heat-induced illnesses occurring if the conditions are not addressed. Further analysis of heat stress risk is required.
- If the total **exceeds 60**, the onset of a heat-induced illness is very likely and action to implement controls should be taken as soon as possible.

It is important to note that that this assessment is to be used as a <u>guide only</u>. A number of factors are not included in this assessment, such as employee health condition and the use of medication.